

wall mounted thermostatic mixer stainless steel with concealed body

wand inbouwthermostaat rvs


900-2500 / 900-2506

installation

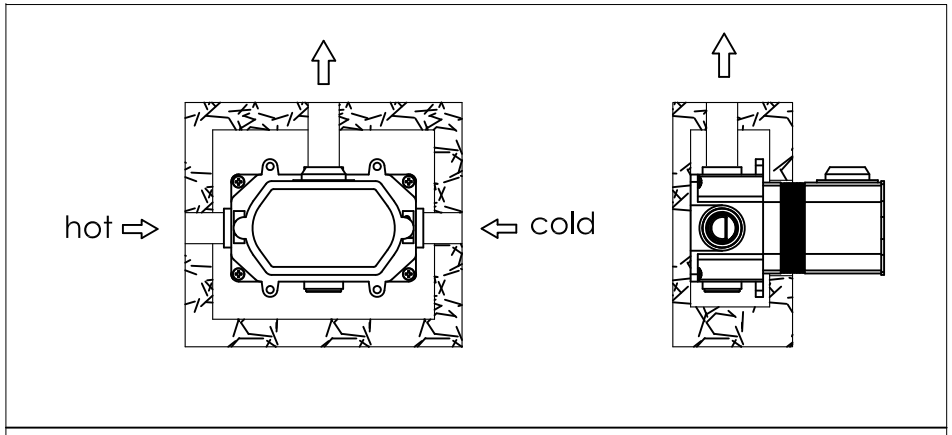


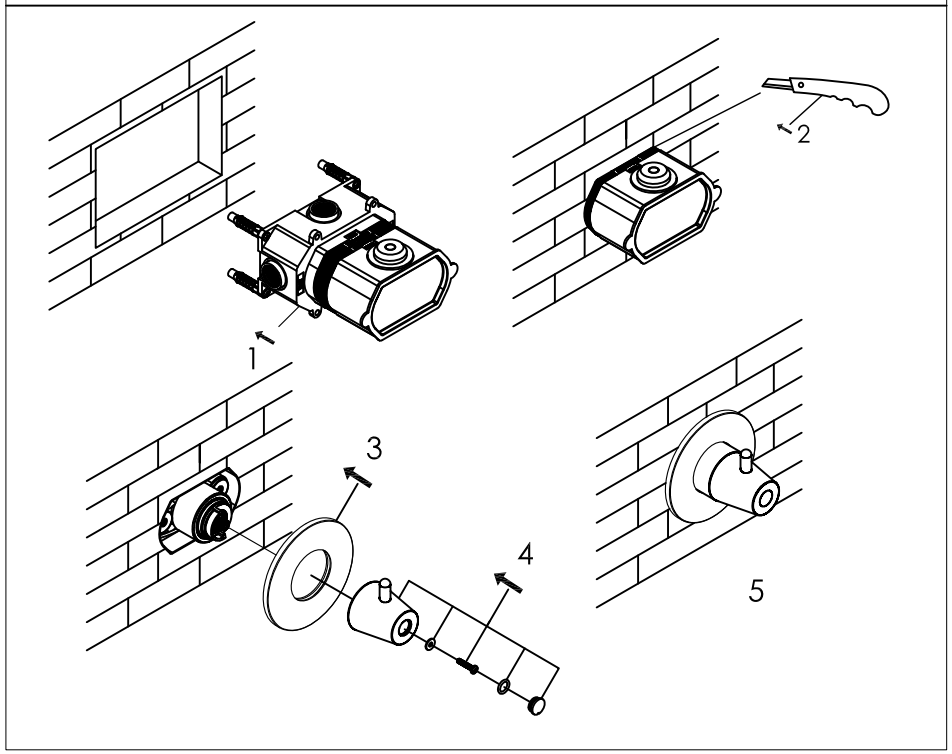

technical diagram

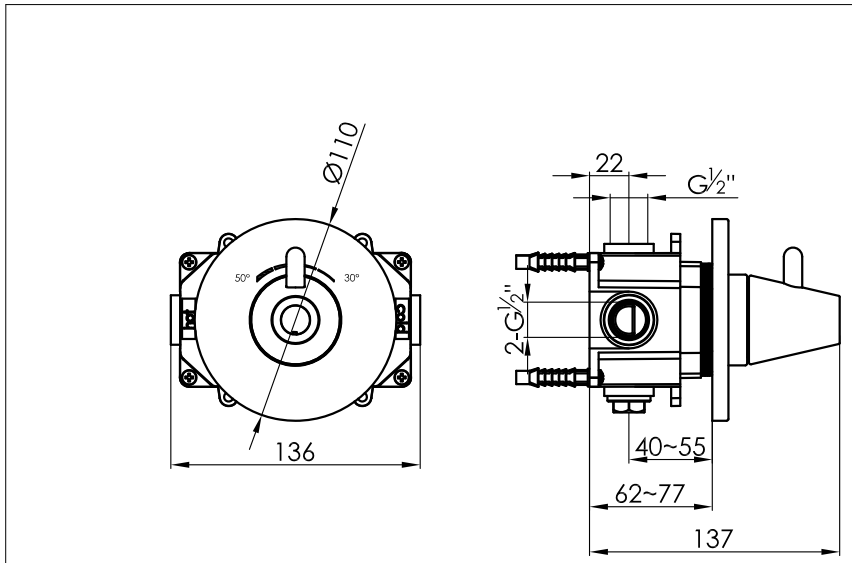

explosion diagram

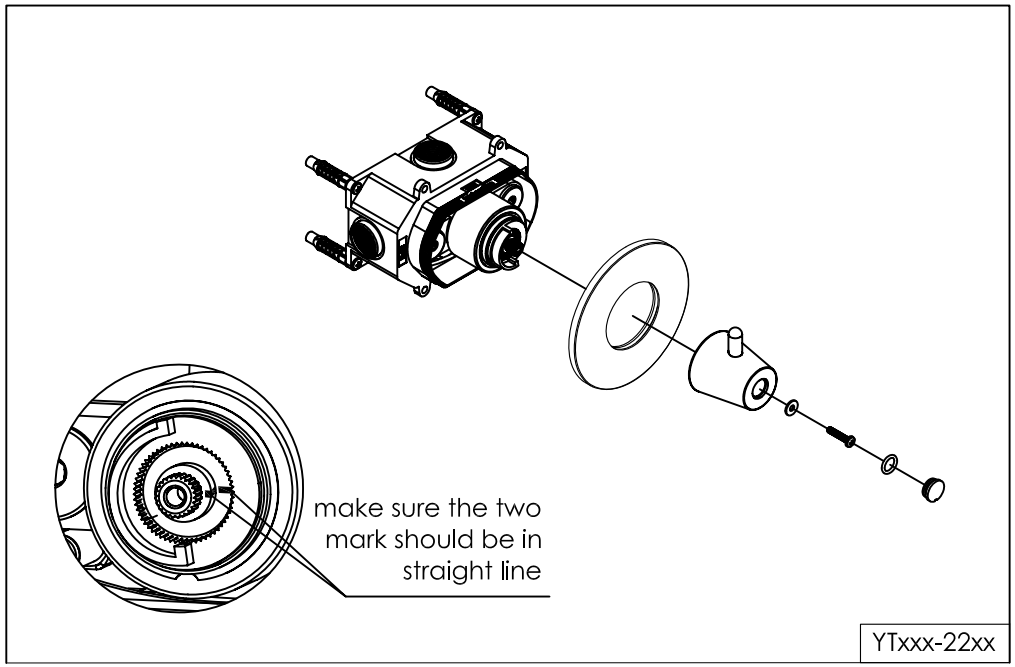

NOTE! *The rosette diameter is Ø110mm.*
Cut tiles within this diameter.


rosette diameter 110mm

tile cutting suggestion option 1 (concealed body)

tile cutting suggestion option 2

900-250X CONE THERMOSTAT

Wall mounted thermostatic mixer. Stainless steel with concealed body. All colour finishes.

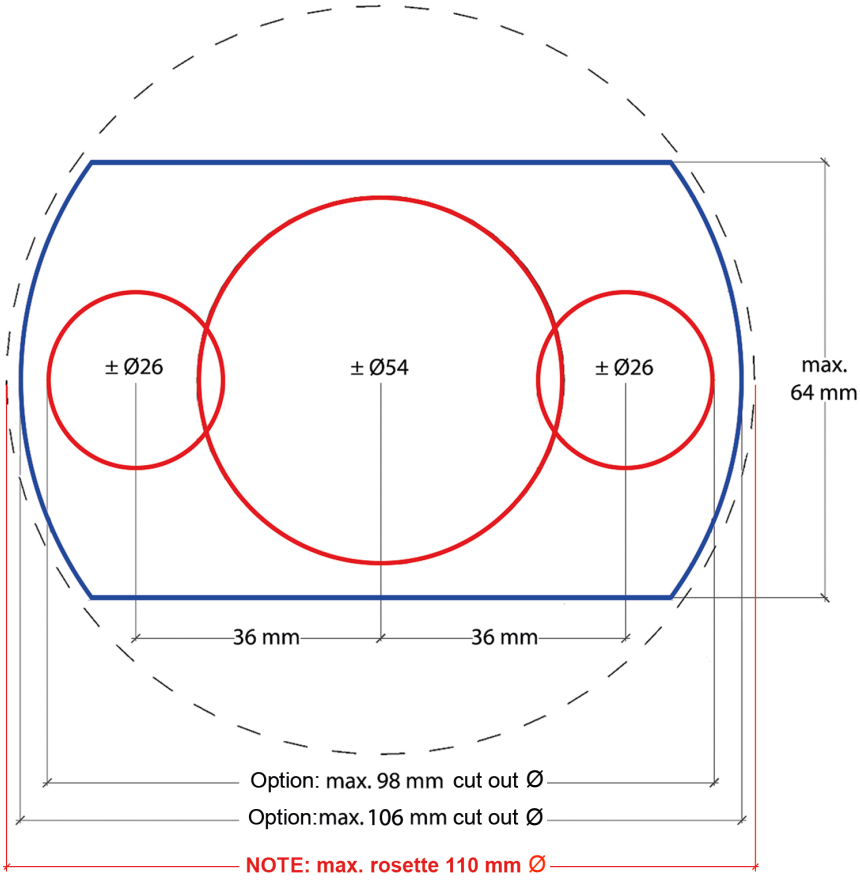

Disclaimer:
Always follow applicable guidelines and regulations for installation. These notifications and suggestions do not replace any installation manual. Installation should be carried out by certified plumber.